

A

Please type a plus sign (+) inside this box → +

PTO/SB/05 (4/98)  
Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
collection of information unless it displays a valid OMB control number.

**UTILITY  
PATENT APPLICATION  
TRANSMITTAL**

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No.	RCA 89,567 DIV
---------------------	----------------

First Inventor or Application Identifier	Karl Francis Horlander
--	------------------------

Title	An Adaptive Video Image Information*
-------	--------------------------------------

Express Mail Label No.	EL379513566US
------------------------	---------------

## APPLICATION ELEMENTS

*See MPEP chapter 600 concerning utility patent application contents.*

**ADDRESS TO:**

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 14]  
(preferred arrangement set forth below)
- Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 4]
4. Oath or Declaration [Total Pages ]
- a. ☐ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)
  - i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (*Appendix*)
6. Nucleotide and/or Amino Acid Sequence Submissions  
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

### ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))  
8. ☐ 37 C.F.R. §3.73(b) Statement ☒ Power of Attorney  
(when there is an assignee)  
9. ☐ English Translation Document (if applicable)  
10. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☐ 11 Copies of IDS Citations  
11. ☐ Preliminary Amendment  
12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)  
\* Small Entity  
13. ☐ Statement(s) ☐ Statement filed in prior application.  
(PTO/SB/09-12) ☐ Status still proper and desired  
14. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)  
15. ☐ Other: .....

**NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:  
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_ / \_\_\_\_\_  
 Prior application information: Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_

**For CONTINUATION or DIVISIONAL APPS only:** The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

**17. CORRESPONDENCE ADDRESS**

- ☐ Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here) or ☐ Correspondence address below

Name	Joseph S. Tripoli				
	Thomson Multimedia Licensing Inc.				
Address	Patent Operation				
	Two Independence Way, P. O. Box 5312				
City	Princeton	State	NJ	Zip Code	08543-5312
Country	USA	Telephone	609/734- 9701	Fax	609/734-9700

Name (Print/Type)	Ronald H. Kurdyla	Registration No. (Attorney/Agent)	26,932
Signature		Date	11-14-00

**Burden Hour Statement:** This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

\*Processing System

EXPRESS MAIL LABEL: EL479513566US

PTO/SB/17-12/99  
Approved for use through 09/30/2000 OMB 065-0032  
Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# FEE TRANSMITTAL for FY 2000

Patent fees are subject to annual revision.  
Small Entity payments must be supported by a small entity statement.  
otherwise large entity fees must be paid. See Forms PTO/SB/09-12.  
See 37 CFR §§ 1.27 and 1.28.

TOTAL AMOUNT OF PAYMENT (\$ ) 912.00

## Complete if Known

Application Number	
Filing Date	HEREWITH
First Named Inventor	Karl Francis Horlander
Examiner Name	
Group / Art Unit	
Attorney Docket No.	RCA 89,567DIV

## METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit Account Number

07-0832

Deposit Account Name

THOMSON multimedia  
Licensing Inc.

- ☒ Charge Any Additional Fee Required  
Under 37 CFR §§ 1.16 and 1.17

2. ☐ Payment Enclosed:

☐ Check ☐ Money Order ☐ Other

## FEE CALCULATION

## 1. BASIC FILING FEE

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
101 690	201 345	Utility filing fee	710
106 310	206 155	Design filing fee	
107 480	207 240	Plant filing fee	
108 690	208 345	Reissue filing fee	
114 150	214 75	Provisional filing fee	

SUBTOTAL (1) (\$ ) 710

## 2. EXTRA CLAIM FEES

Total Claims	Extra Claims	Fee from below	Fee Paid
29 - 20**	9	18	162
3 - 3**	0		0
Multiple Dependent			

\*\*or number previously paid, if greater; For Reissues, see below

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
103 18	203 9	Claims in excess of 20	
102 78	202 39	Independent claims in excess of 3	
104 260	204 130	Multiple dependent claim, if not paid	
109 78	209 39	** Reissue independent claims over original patent	
110 18	210 9	** Reissue claims in excess of 20 and over original patent	

SUBTOTAL (2) (\$ ) 162

## FEE CALCULATION (continued)

## 3. ADDITIONAL FEES

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
105 130	205 65	Surcharge - late filing fee or oath	
127 50	227 25	Surcharge - late provisional filing fee or cover sheet	
139 130	139 130	Non-English specification	
147 2,520	147 2,520	For filing a request for reexamination	
112 920*	112 920*	Requesting publication of SIR prior to Examiner action	
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action	
115 110	215 55	Extension for reply within first month	
118 380	218 190	Extension for reply within second month	
117 870	217 435	Extension for reply within third month	
118 1,360	218 680	Extension for reply within fourth month	
128 1,850	228 925	Extension for reply within fifth month	
119 300	219 150	Notice of Appeal	
120 300	220 150	Filing a brief in support of an appeal	
121 260	221 130	Request for oral hearing	
138 1,510	138 1,510	Petition to institute a public use proceeding	
140 110	240 55	Petition to revive - unavoidable	
141 1,210	241 605	Petition to revive - unintentional	
142 1,210	242 605	Utility issue fee (or reissue)	
143 430	243 215	Design issue fee	
144 580	244 290	Plant issue fee	
122 130	122 130	Petitions to the Commissioner	
123 50	123 50	Petitions related to provisional applications	
126 240	126 240	Submission of Information Disclosure Stmt	
581 40	581 40	Recording each patent assignment per property (times number of properties)	40
146 690	246 345	Filing a submission after final rejection (37 CFR § 1.129(a))	
149 690	249 345	For each additional invention to be examined (37 CFR § 1.129(b))	

Other fee (specify) \_\_\_\_\_

Other fee (specify) \_\_\_\_\_

\* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$ ) 40

## SUBMITTED BY

Name (Print/Type)	Ronald H. Kurdyla	Registration No. (Attorney/Agent)	26,932	Telephone	609-734-9701
Signature	<i>RH Kurdyla</i>	Date	11-14-00		

## WARNING:

Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

## An Adaptive Video Image Information Processing System

This is a divisional application of United States Patent Application Serial No. 09/454,398 by K. F. Horlander, filed December 3, 1999 which is a non-provisional application of provisional application serial No. 60/136,456 filed May 28, 1999.

### Field of the Invention:

The present invention relates to selecting a format for recording, reproducing and display of video image information received with a signal including conditional access information, the conditional access information determining the format for recording, reproduction and display of the video image information.

### Background of the Invention

Conditional access systems for subscriber units such as cable subscriber set-top box decoders are well-known in the art. Conditional access is conventionally achieved by downloading one or more authorization levels for storage in the decoder. The stored authorization levels may be represented by a bit map or a list of individual multi-bit codes, or a combination of both. Each received subscription program, which is normally scrambled to prevent access thereto by an unauthorized subscriber, includes an authorization code or conditional access information identifying the associated program. If the conditional access information corresponds to an authorized level in the stored bit map or a stored listed authorization level of the subscriber, a descrambling circuit within the subscriber's decoder is enabled to descramble the signal for viewing by the subscriber. If the received conditional access information does not match any stored authorization level descrambling of the accompanying program is inhibited or prevented.

Such conditional access systems lack the operational flexibility that is desirable for taking advantage of the features and capabilities that are supported by the new generation of digital decoder set top boxes. It is desirable for set top boxes and other decoder systems to be able to provide a user with additional pricing and subscription choices for recording, reproduction and/or display of a video image based upon personal taste and the capabilities of the subscriber's video equipment. The system described herein addresses these needs

## SUMMARY OF THE INVENTION

5 Video image information is received in a signal including conditional access information. The conditional access information is associated with one of a plurality of picture resolution formats for recording, reproducing and displaying the video image information. The conditional access information in the received signal is decoded. A format for at least one of recording, reproducing and displaying the video  
10 image information is adaptively selected in response to the decoded conditional access information. The video image information is then processed using the selected format. The conditional access information may further include information indicating a predetermined time period during which reproduction of recorded video image information is permitted.

## BRIEF DESCRIPTION OF THE DRAWING

15 Figure 1 shows a Vertical Blanking Interval (VBI) data format facilitating adaptive data recovery and decoder operation, according to invention principles.

20 Figure 2 shows the Vertical Blanking Interval (VBI) data format of Figure 1 incorporating a particular configuration of header and payload data, according to invention principles.

25 Figure 3 shows a video system including a High Definition (HD) video decoder, a video monitor and a VCR employing the VBI ancillary data format of Figure 1 for selecting decoder processing functions based on copy protection information, according to invention principles.

30 Figure 4 shows a video system similar to the system of Figure 3 employing the VBI ancillary data format of Figure 1 for selecting further decoder configurations, according to invention principles.

35 Figure 5 shows a video system similar to the system of Figure 3 employing the VBI ancillary data format of Figure 1 used in another decoder configuration, according to invention principles.

## DETAILED DESCRIPTION OF THE DRAWING

Figure 1 shows a Vertical Blanking Interval (VBI) data format facilitating adaptive data recovery and decoder operation. The data format advantageously facilitates adaptive decoder multiple mode operation in different data detection and recovery modes. The data format also advantageously employs a data bit period that accommodates data encoded using clock rates associated with different standards. Specifically, the data format of Figure 1 employs a quadrature (i.e. a "1010" bit pattern) reference symbol start pulse (item 10 of Figure 1) of half a byte duration that substantially starts at the start of active video of a horizontal video line (item 29 of Figure 1). The use of such a quadrature reference symbol, defined to start at the beginning of active video, enables a decoder to detect and recover data by either of two different recovery methods. Such a data format enables a decoder to recover data either by, (a) pulse detection following synchronization to the quadrature reference symbol using a phase locked loop, for example, or (b) line-locked pulse detection, without prior phase locked loop synchronization, based on the known (active video) start time of the reference symbol following the horizontal sync pulse of the analog video signal. Further, the double pulse (i.e. 1010) bit pattern of reference symbol 10 offers improved phase lock loop synchronizing capability over a single pulse (i.e. 10) bit pattern as exemplified by the VBI data signal reference pulse sequence of the EIAJ CPR-1204-1 standard. This is because the reference symbol provides a detector circuit with a larger number of pulse edges for use in detection and synchronization in comparison to the single pulse reference symbol pattern.

The data format of Figure 1 also employs a data bit period that accommodates data encoded using clock rates associated with different standards. Specifically, the bit period of the Figure 1 data format is advantageously selected to comprise a first integral multiple of a first clock period associated with a first data format, and a different second integral multiple of a second clock period associated with a second data format. In the data format of Figure 1 the ancillary data bit period is selected to be a multiple of, (a) 20 times the 27 MHz clock period associated with EIA 770.1 and EIA 770.2 video standards (and also associated with the MPEG system standard ISO 13818-1 section 2.5.2.1), and also a multiple of, (b) 55 times the 74.25 MHz clock period associated with the EIA 770.3 video standard (item 31 of Figure 1). The resultant selected bit period of the Figure 1 data format is approximately 741 nano-seconds in duration. In Figure 1, the ancillary data bit period of item 33 comprises a multiple of 60 times an 81 MHz clock period which is used as a video

clock in a number of digital video systems. Also, since the 81 MHz clock period is an integral multiple (i.e. a 3 times multiple) of a 27 MHz clock period the bit period of the Figure 1 data format accommodates data encoded using 81 MHz, 27 MHz, and 74.25 MHz (and other integral multiple) clock rates associated with different standards.

The multi-standard compatible bit period of the data format of Figure 1 enables ancillary data to be encoded by devices operating with clock frequencies associated with any one of a number of different standards e.g. with the 27 MHz clock frequency of the EIA 770.1, EIA 770.2 or MPEG standards or with the 74.25 MHz frequency of the EIA 770.3 standard. The resultant ancillary data, incorporated within an analog video signal VBI (and compatible with the format of Figure 1), is recoverable and decodable by a decoder without the need to know the standard employed by the originating device.

The features of the Figure 1 data format facilitate adaptive data recovery by either, (a) phase locked loop synchronized pulse detection and (b) line-locked pulse detection independent of phase locked loop synchronization. These features also facilitate the adaptive decoding of ancillary data provided by devices operating using different video coding standards (e.g. EIA 770.1, EIA 770.2, EIA 770.3 or MPEG standards). Further, the combination of quadrature reference symbol and multi-standard compatible bit period provides significant flexibility, adaptability and simplicity advantages for inter-device communication between cost sensitive consumer devices such as televisions (including analog, digital and high definition TV (HDTV)), VCRs, digital video disk (DVD) players and set top boxes etc.

The Figure 1 data format supports communication of multiple data types and services including, captions, conditional access information, copy protection data, configuration information, display format/standard identification data, descriptive data and control information. This information is conveyed in the ancillary data format of Figure 1 on a horizontal line in the VBI e.g. on line 42 of a 2H display system (a display system using substantially twice the NTSC horizontal line rate). Alternatively, it may be incorporated on this line or another line in a 1H or 2.14H or other line rate system. The ancillary data format includes a header byte (item 15 of Figure 1) that identifies a destination service for a payload of the ancillary data or an address identifying a destination of the payload. The address comprises 7 bits (item 25) and a single parity bit (item 27). The parity bit in the address header enables error detection to be performed on individual header bytes. The address bits (item 25) may comprise a service identifier e.g. identifying payload data as being caption, configuration, display format, video standard, conditional access, copy protection,

description or other control information. Alternatively, the address bits may comprise another identifier associated with the payload data and the parity bit may be omitted.

The ancillary data format also includes two payload bytes (item 20 of Figure 1) as may be used for EIA770.3 standard communication, for example. In other embodiments, the data format structure may include different numbers of header and payload bytes. The header address or service identifier (item 15) is associated with the two byte payload (item 20). One or more of the payload data bits may also be allocated as a parity bit for use in detecting payload errors in individual payload data segments (e.g. for individual bytes or for both bytes together). The payload data may also be used to transport larger messages in multiple video frames conveyed in multiples of two byte segments. For this purpose, the header (or payload in another embodiment) includes information that indicates a message is being sent in multiple horizontal line ancillary data segments and that may also enable the segments to be assembled into a single message. Further, an error detection and/or correction code may be conveyed with the payload data to validate and correct messages.

Figure 2 shows the Vertical Blanking Interval (VBI) data format of Figure 1 incorporating a particular configuration of header and payload data. Figure 2 shows a single byte payload as may be used for EIA770.3 standard communication, for example. In Figure 2, the first payload byte is allocated to be a service identifier (item 40). Consequently, both an address (item 15) and a service identifier (item 40) are associated with a single byte payload (the remaining byte of item 20). As a result, the payload data may be flexibly processed by different devices for different functions. Alternatively, both the header byte (item 15) and one byte of the payload (item 20) may be used to provide a single 16 bit address or service identifier. Thereby extending the range of identifiers and addresses that may be used.

The ancillary data is encoded on luminance information (Y) in a Y Pr Pb luminance-chrominance format video signal. The ancillary data may also be identically encoded on each of the color signals in an RGB format video signal or may be conveyed on only or two of the color signals. Alternatively, each individual component signal of an RGB or Y Pr Pb format video signal may be used to convey different ancillary data. The ancillary data may be similarly conveyed in the component video signals of other format video signals.

Figure 3 shows a video system including a High Definition (HD) video decoder 110, a video monitor (e.g. TV) 100 and a VCR 105 employing the VBI ancillary data format of Figure 1 for selecting decoder processing functions based on copy protection information. In other embodiments, decoder 110 and monitor 100 may be combined in a single unit. The copy protection information is compatible with

15

20

3



contains an upsampling interpolator for converting SD video data to HD video data and a downsampling interpolator for converting HD video data to SD video data. VCR 105 also contains MPEG decoding/encoding and analog to digital and digital to analog conversion and sampling functions to convert between digital HD and SD data and analog composite video data. VCR 105 selects a signal recording format and converts the input signal data (HD, SD or composite analog) to the desired format for recording, in response to configuration and copy protection information received from decoder 110. VCR 105 also blocks recording or playback of prohibited material in response to the copy protection information.

The signal format conversion capability of VCR 105 enables VCR 105 to adaptively select a signal format for recording or playback, in response to copy protection information received from decoder 110. Thereby, VCR 105 advantageously selects play back or recording modes (and associated display formats) as well as subsequent copying limitations (e.g. prohibiting subsequent copying, allowing one subsequent copy, or unlimited subsequent program copying) based on copy protection data reflecting User designated billing and conditional access options. As a result, a User may only be allowed to record a program in a particular format and to view a program on playback in a particular format based on the User's pre-selected billing options. Such a particular format may comprise, for example, one of the HD, SD or analog signal formats. Similarly, the copy protection data may allow time based limitations based on a User's pre-selected billing options. Such limitations may permit a User to view a program upon playback for a limited period e.g. 3 months only. In addition, the copy protection data may allow a combination of time based and signal format limitation allowing playback and display of a program for a specific period (e.g. 3 months) in one format (e.g. HD format) and another period (e.g. a subsequent year) in a different format (e.g. SD format), for example.

It is to be noted that in other embodiments VCR 105 may receive and process MPEG SD video data or an analog composite video signal for recording. Also, VCR 105 may include the capability of converting between different display formats including, a 1H line rate format, a 2H line rate format and a 2.14H line rate format and other formats either for recording or upon playback. VCR 105 may also include the capability of providing a desired interlaced format (e.g. 1920 x 720 pixel resolution) or progressive format (e.g. 1920 x 720 pixel resolution) for recording operation or upon playback, by the use of additional sample rate converter interpolation functions. Further, the adaptive conversion and copy protection functions of VCR 105 may alternatively be located in a separate unit e.g. decoder 110

or in a single combined unit that includes the functions of both decoder 110 and VCR 105.

Figure 4 shows a video system similar to the system of Figure 3 employing the VBI ancillary data format of Figure 1 for selecting further decoder configurations. The Figure 4 system includes High Definition (HD) video decoder 130, a video monitor (e.g. TV) 100 and a VCR 129 employing the VBI ancillary data format of Figure 1 for selecting decoder processing functions based on copy protection information. Decoder 130 advantageously provides both 1H and 2H line rate format signals to VCR 129 and video monitor 100. This enables decoder 130 to configure VCR 129 using the ancillary data format of Figure 1 (conveyed in the 1H or 2H composite signal VBI) to process either 1H (e.g. NTSC format) or 2H (e.g. 1920 x 1080 pixel resolution) video and audio formats. Further, VCR 129 includes the capability of converting between 1H line rate format, a 2H line rate format (or 2.14H line rate format) either for recording or upon playback. Alternatively, this conversion may be performed within decoder 130.

Figure 5 shows a video system similar to the system of Figure 3 employing the VBI ancillary data format of Figure 1 used in another decoder configuration. The Figure 5 system includes High Definition (HD) video decoder 130, a 1H line rate display format video monitor (e.g. TV) 100 and a 2H line rate format VCR 125 employing the VBI ancillary data format of Figure 1. In the Figure 5 system, decoder 130 both communicates with and configures monitor 100, using ancillary data conveyed in the VBI of a 1H line rate (e.g. NTSC compatible) analog composite video signal. Further, decoder 130 communicates with, and configures, VCR 125 using ancillary data conveyed in the VBI of a 2H line rate (e.g. EIA 770.1 compatible) analog composite video signal. In an exemplary recording mode, decoder 130 provides 2H line rate compatible analog composite video representing a high definition program to VCR 125 for recording. Decoder 130 also configures VCR 125 to record this program in 2H line rate format. In playback mode, VCR 125 converts the recorded 2H line rate format video to 1H line rate format video for output to monitor 100 for display. This is performed in response to User initiation of a playback command and configuration information conveyed from decoder 130, identifying the display monitor as a 1H format monitor. Alternatively, VCR 125 may convey the 2H line rate video to decoder 130 for conversion by decoder 130 to 1H line rate format and display on monitor 100. In another embodiment, VCR 125 converts the 2H line rate format video, from decoder 130, to 1H line rate format for recording in 1H format in response to configuration information conveyed from decoder 130 in the VBI of

the 1H line rate signal. The recorded 1H line rate video is output to monitor 100 for display in response to User initiation of a playback command.

The ancillary data structure of Figures 1 and 2 is not constrained to be conveyed in analog composite video of 1H, 2H or 2.14H line rates but may be conveyed in an analog or digital video signal using any line rate. Further, the ancillary data may be used for control purposes in other system configurations not just those described in connection with Figures 3-5. In addition, other ancillary data structures may be derived in accordance with the principles embodied in the adaptive data recovery and multi-standard compatibility characteristics of the format of Figures 1 and 2.

## WHAT IS CLAIMED IS:

1. A method of selecting a format for displaying video image information received in a signal including conditional access information, said method comprising the steps of :

- a) receiving said signal including video image information and conditional access information associated with one of a plurality of picture resolution formats;
- b) decoding said conditional access information in the received signal;
- c) adaptively selecting a picture resolution format in response to said decoded conditional access information; and
- d) processing said video image information using said selected picture resolution format.

2. The method of claim 1, wherein selection of said picture resolution format is in response to said decoded conditional access information determining user entitlement to select one of said plurality of available picture resolution formats.

3. The method of claim 1, wherein said picture resolution format is one of:

- i) a standard definition format; and
- ii) a high definition format.

4. The method of claim 1, further comprising the step of recording said video image information in said selected picture resolution format on a recording medium.

5. The method of claim 4, further comprising the step of reproducing said recorded video image information in said selected picture resolution format on a display.

6. The method of claim 1, wherein said video image information of said received signal is transmitted as a digital signal on a first channel.

7. The method of claim 6, further comprising the step of receiving ancillary data transmitted on a second channel for controlling processing of said video image data.

8. The method of claim 7, wherein said ancillary data is transmitted as an analog video signal.

9. The method of claim 1, wherein each of said plurality of picture resolution formats is associated with a respective billing rate and further comprising the step of billing a

user at the billing rate associated with a selected one of said plurality of picture resolution formats.

10. A method of selecting a format for displaying video image information received  
5 in a signal including copy protection information, said method comprising the steps of:

- a) receiving said signal including video image information and copy protection information associated with one of a plurality of display formats;
- b) decoding said copy protection information in the received signal;
- c) adaptively selecting a format for displaying said video image information on  
10 a display in response to said decoded copy protection information; and
- d) processing said video image information using said selected display format.

11. The method of claim 10, wherein selection of said display format is in response  
15 to said decoded copy protection information determining user entitlement to select one of said plurality of available display formats.

12. The method of claim 10, wherein said display format is one of:

- i) a standard definition format; and
- ii) a high definition format.

13. The method of claim 10, further comprising the step of recording said video  
image information in a format determined by said decoded copy protection information on a  
recording medium.

14. The method of claim 13, further comprising the step of reproducing said  
25 recorded video image information in said format determined by said decoded copy protection  
information on a display.

15. The method of claim 10, wherein said video image information of said received  
30 signal is transmitted as a digital signal on a first channel.

16. The method of claim 15, further comprising the step of receiving ancillary data  
transmitted on a second channel for controlling processing of said video image data.

17. The method of claim 16, wherein said ancillary data is transmitted as an analog  
35 video signal.

18. The method of claim 10, wherein each of said plurality of display formats is associated with a respective billing rate and further comprising the step of billing a user at the billing rate associated with a selected one of said plurality of display formats.

5 19. A method of selecting a format for recording video image information received in a signal including copy protection information, said method comprising the steps of:

- a) receiving said signal including video image information and copy protection information associated with one of a plurality of recording formats;
- b) decoding said copy protection information in the received signal;
- 10 c) adaptively selecting a format for recording said video image information on a recording medium in response to said decoded copy protection information; and
- d) processing said video image information using said selected recording format.

15 20. The method of claim 19, wherein selection of said recording format is in response to said decoded copy protection information determining user entitlement to select one of said plurality of available recording formats.

20 21. The method of claim 19, wherein said recording format is one of:

- i) a standard definition format; and
- ii) a high definition format.

25 22. The method of claim 19, further comprising the step of recording said processed video image information in said selected recording format on a recording medium.

23. The method of claim 22, further comprising the step of reproducing said recorded video image information in said selected recording format on a display.

30 24. The method of claim 19, wherein said copy protection information further includes information indicating a time period during which said processed video image information is able to be reproduced.

35 25. The method of claim 24, wherein said time period is set in response to said decoded copy protection information determining user entitlement to select one of said plurality of available recording formats.

26. The method of claim 19, wherein said video image information of said received signal is transmitted as a digital signal on a first channel.

5 27. The method of claim 26, further comprising the step of receiving ancillary data transmitted on a second channel for controlling processing of said video image data.

28. The method of claim 27, wherein said ancillary data is transmitted as an analog video signal.

10 29. The method of claim 19, wherein each of said plurality of recording formats is associated with a respective billing rate and further comprising the step of billing a user at the billing rate associated with a selected one of said plurality of recording formats.

15

004477 "SECRET" 250

ABSTRACT

Video image information is received in a signal including conditional access information. The conditional access information is associated with one of a plurality of picture resolution formats for recording, reproducing and displaying the video image information. The conditional access information in the received signal is decoded. A format for at least one of recording, reproducing and displaying the video image information is adaptively selected in response to the decoded conditional access information. The video image information is then processed using the selected format. The conditional access information may further include information indicating a predetermined time period during which reproduction of recorded video image information is permitted.

0044T "SECRET" 250



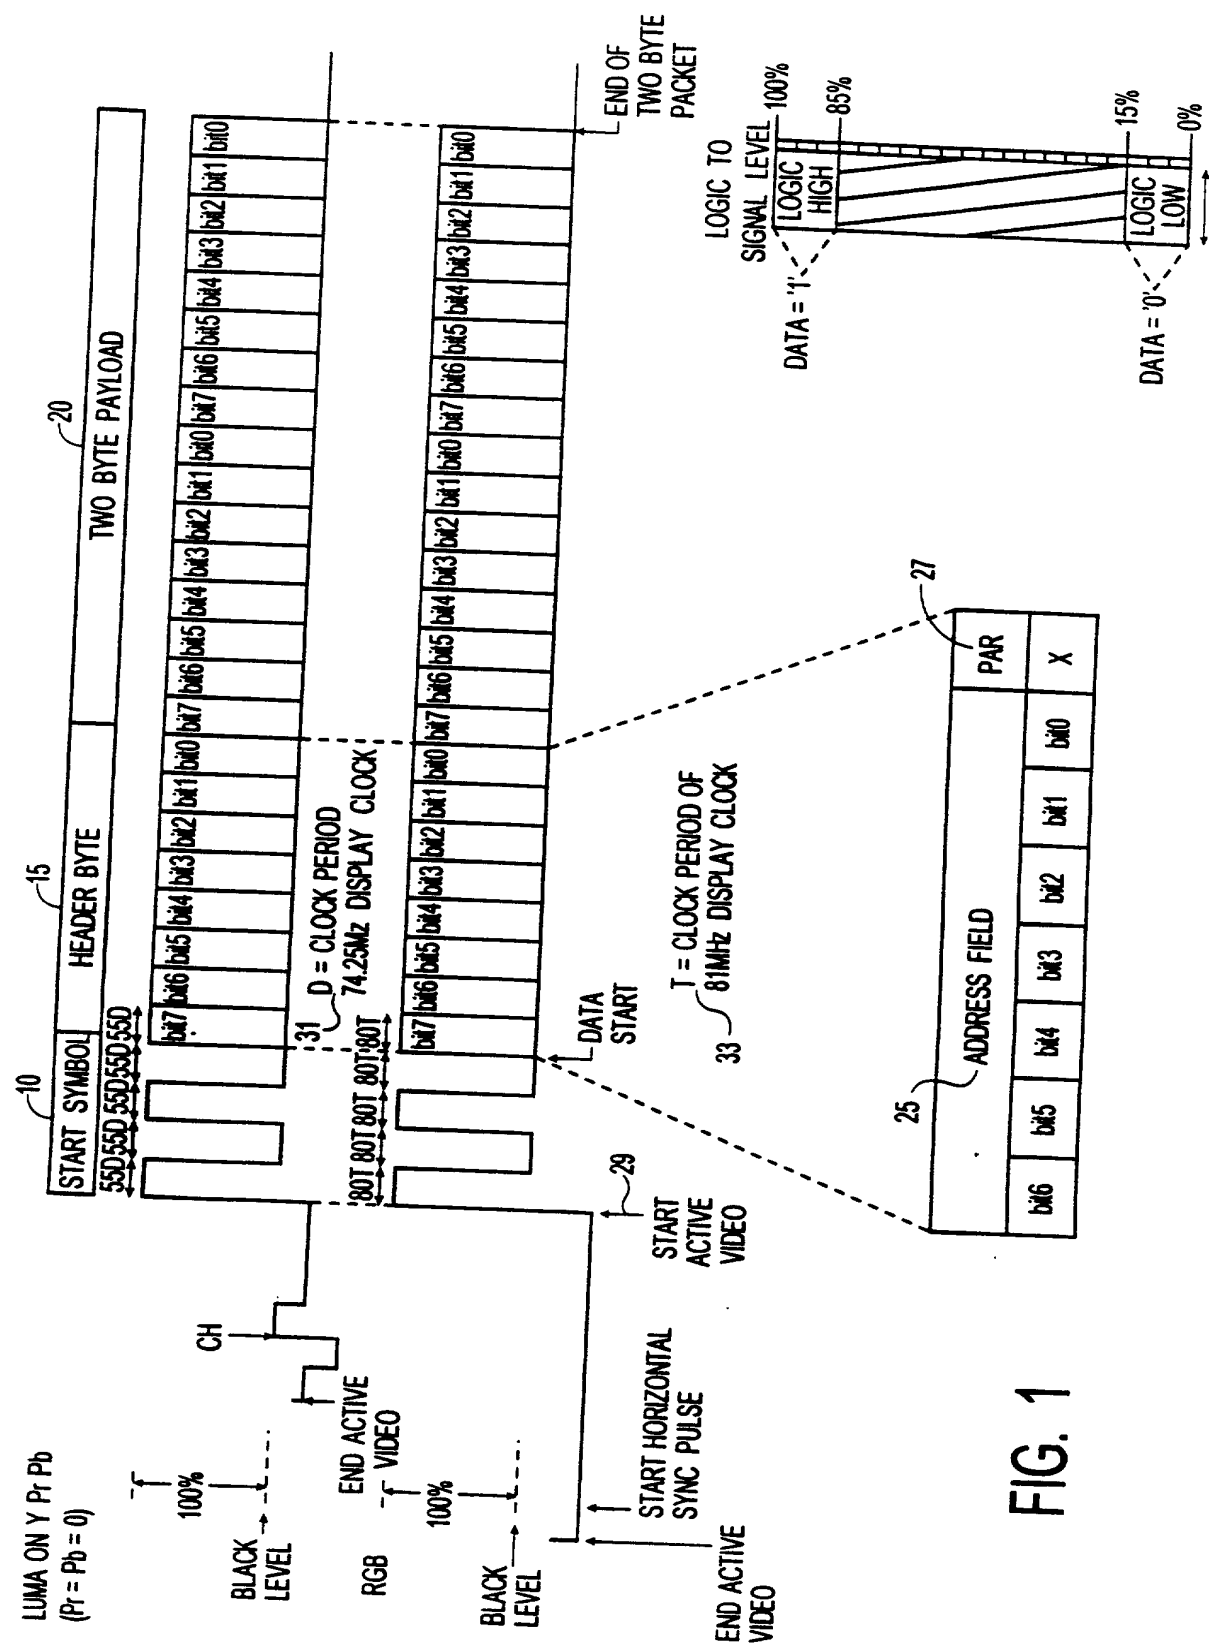


FIG. 1

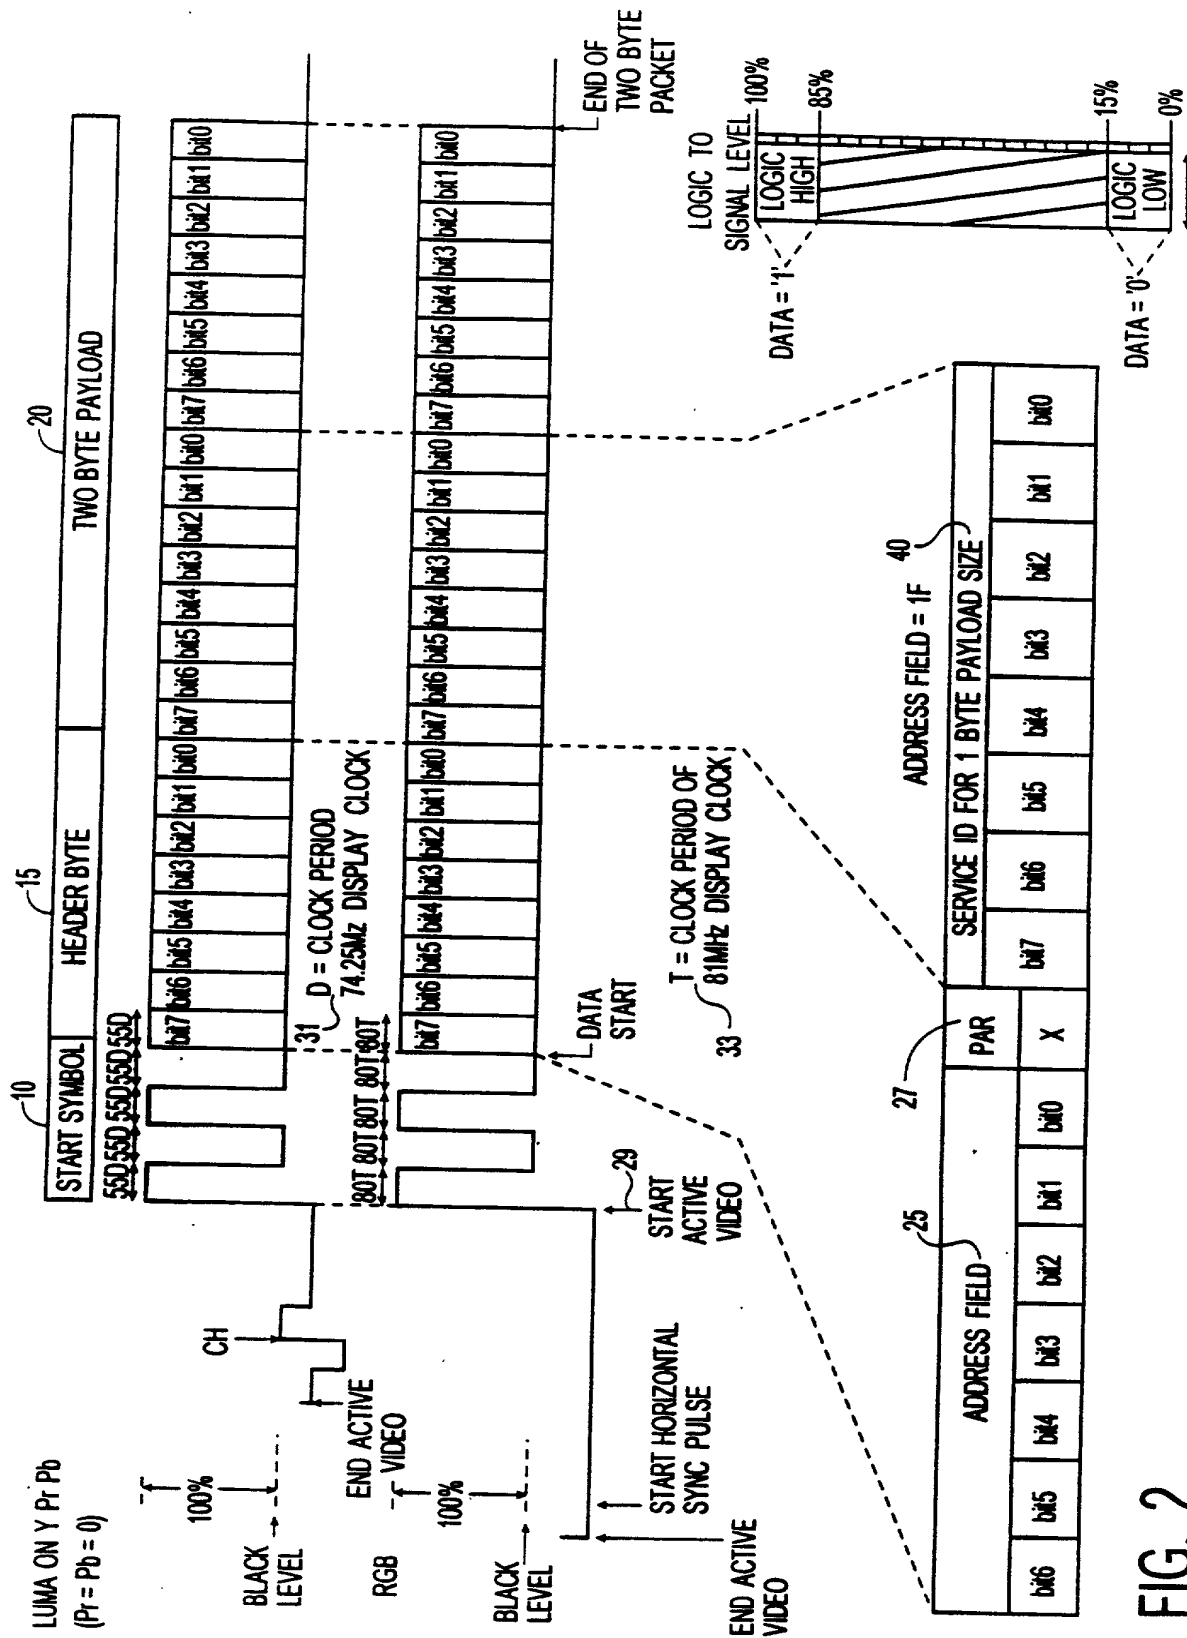


FIG. 2

FIG. 3

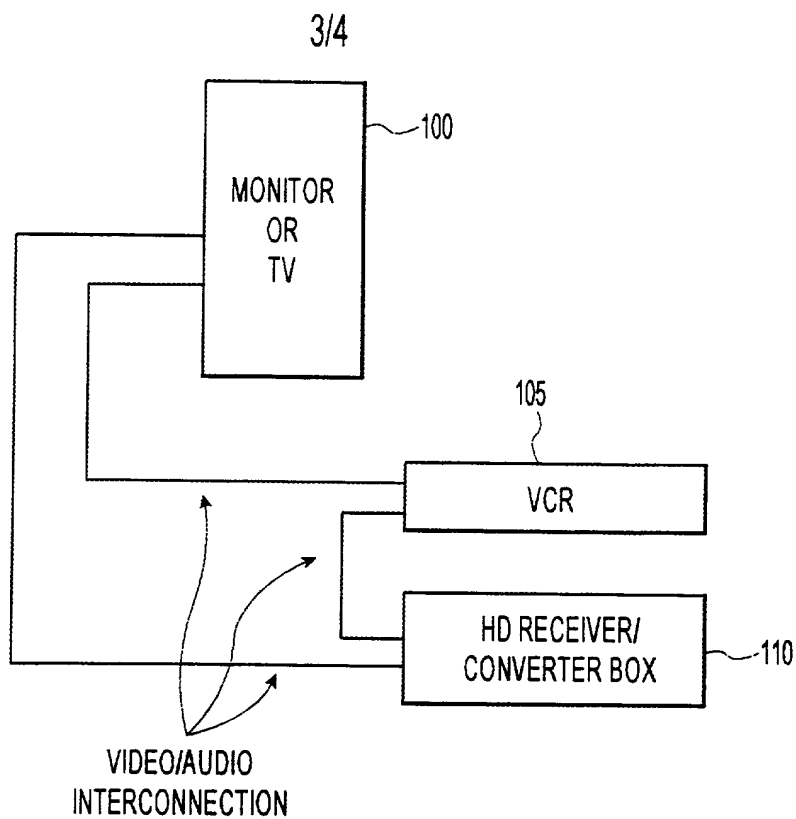
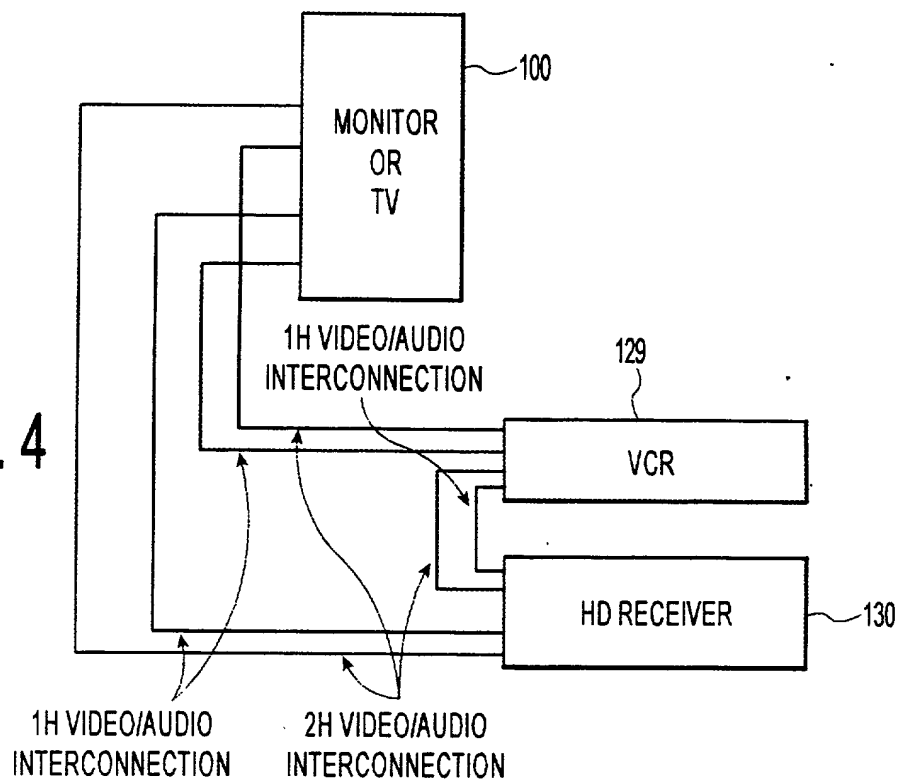


FIG. 4



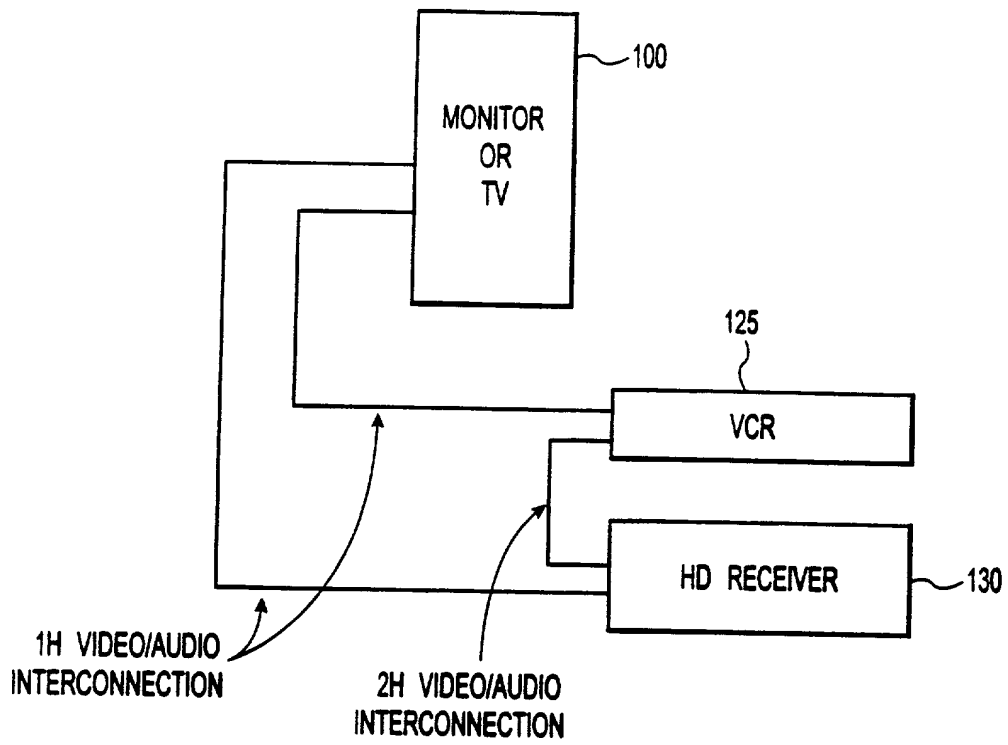


FIG. 5